


# SWT36L

## MINATURE OMNI-DIRECTIONAL MICRO-LAPEL MICROPHONE

### FEATURES



- Smooth, Natural Sound Reproduction
- Compact, Low Profile Design
- Professional Quality and Reliability
- Durable Black Case

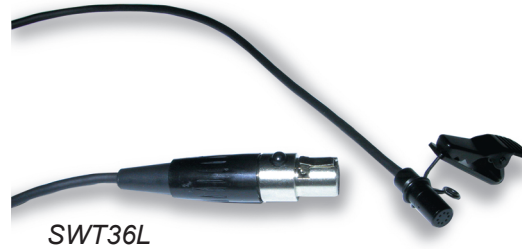

### SPECIFICATIONS

Generating Element:	Back Electret Condenser
Polar Pattern:	Omni-Directional
Open Circuit Sensitivity:	-44 dB (re: 1V/Pa) @ 1 kHz
Impedance:	1 k ohms @ 1 kHz
Frequency Response:	20 Hz – 16 kHz
Operating Voltage (Power Module):	1 – 10V DC
Standard Operating Voltage:	3V DC
Maximum Input SPL:	112 dB @ 1% THD
Cable:	1.5 m/5 ft. (standard)
Cable Type:	Single-conductor/Shielded
Connector:	TA4
Dimensions:	14.5mm x 6mm/.57 in. x .24 in.
Weight:	4.5 g / 0.16 oz. (without cable)

### FREQUENCY RESPONSE & POLAR PATTERN

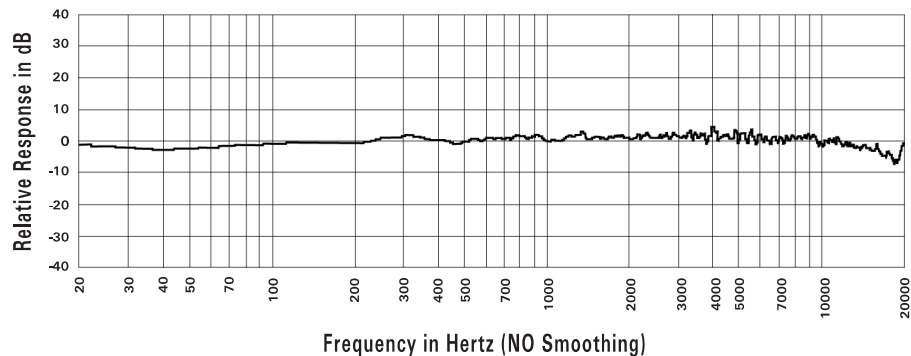

© 2004 Sabine, Inc.

Sabine, Inc.  
13301 NW US Highway 441  
Alachua, Florida 32615-8544 USA  
+USA (386) 418-2000  
+USA (386) 418-2001 fax  
www.Sabine.com

**SABINE**<sup>®</sup>  
ADAPTIVE AUDIO