

SWT56W

HEAVY-DUTY PERFORMANCE HEADWORN MICROPHONE

FEATURES




- Professional Sound Quality
- Heavy-Duty Headworn Design
- Adjustable, Rubber-Coated Steel Head Band
- Condenser
- Rugged, Durable Construction

SPECIFICATIONS

Cable	1.22 m / 4 ft. (standard)
Cable Type	2-Conductor / Shielded
Connector	TA4F
Weight	42 g / 1.5 oz. (without cable)
Weight	52 g / 1.8 oz. (without cable)
Generating Element	Electret Condenser
Polar Pattern	Super-Cardioid
Open Circuit Sensitivity	-41 dB (re: 1V/Pa) @ 1KHz
Impedance	1K Ohms @ 1 KHz
Self Noise	34 dBA
Frequency Response	100-16,000 Hz
Signal to Noise	60 dB
Maximum Input SPL	120 dB SPL
Dynamic Range	86 dB



POLAR PATTERN & FREQUENCY RESPONSE

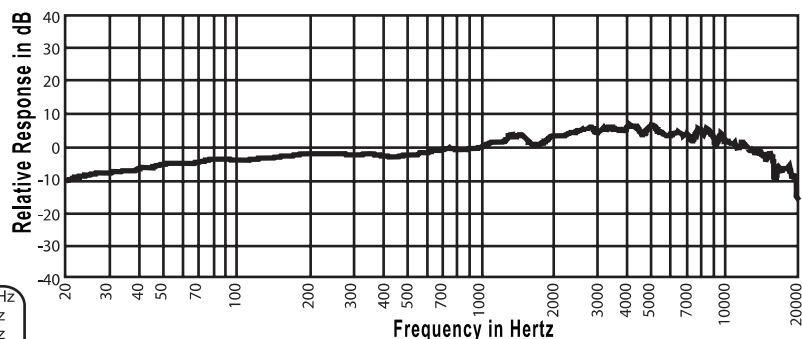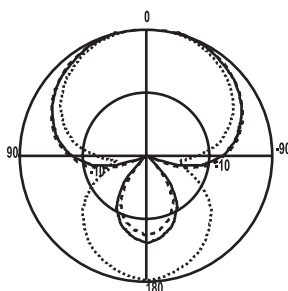

© 2004 Sabine, Inc.

Sabine, Inc.
13301 NW US Highway 441
Alachua, Florida 32615-8544 USA
+USA (386) 418-2000
+USA (386) 418-2001 fax
www.Sabine.com

SABINE[®]
ADAPTIVE AUDIO